

# Product datasheet

Specifications



## KNX ARGUS Presence with light control and IR receiver, polar white

MTN630919

### Main

Range	KNX
Product or component type	Presence detector
Bus type	KNX
Colour tint	Polar white

### Complementary

Device presentation	Complete product
Number of channels	6
Protection type	Creep zone protection
Type of setting	Light sensitivity adjustable
Duty cycle	15300 minutes
Time delay range	0...1 s (switch-on)
Detection face	Lateral: 7 m
Detection angle	360° horizontal
Device mounting	Flush
Mounting height	2.5 m

### Environment

IP degree of protection	IP20
-------------------------	------

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.000 cm
Package 1 Width	14.300 cm
Package 1 Length	18.200 cm
Package 1 Weight	184.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	6
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm

---

Package 2 Weight	1.512 kg
------------------	----------

## Contractual warranty

---

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint 10

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant with Exemptions

SCIP Number 21417b1e-991d-4771-a355-9042ba55509b

REACH Regulation [REACH Declaration](#)

Halogen-free status Halogen free product

PVC free Yes

## Use Longer

### Lifetime extension

Repair No

## Use Again

### Repack and remanufacture


End of life manual availability [End of Life Information](#)

Take-back No

WEEE Label The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Wiring diagram

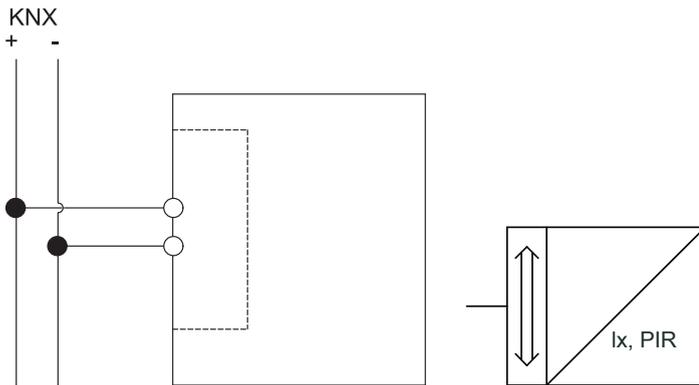

⚠ ⚠ DANGER
<p><b>HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH</b></p> <p>The product must be installed and connected by a qualified electrician. A qualified electrician must demonstrate an in-depth knowledge of:</p> <ul style="list-style-type: none"> <li>• Construction of electrical installations in buildings in accordance with IEC 60364</li> <li>• Additional safety standards, local connection rules, and building regulations</li> <li>• Standardized tools and measuring equipment</li> </ul> <p><b>Failure to follow these instructions will result in death or serious injury.</b></p>